



Hardware Manual

Vision Sensor PV4

Version 1.0 – February 2026

1	Handling and safety instructions	3
2	Introduction.....	4
2.1	Main features	5
2.2	Configurations.....	6
2.3	Block diagram.....	7
3	Operating Conditions	8
4	Status LEDs	9
5	Interfaces.....	10
5.1	Power and I/O.....	10
5.1.1	Digital I/Os	11
5.2	1000 Mbit/s Ethernet	12
6	Image sensors	13
6.1	e2v Snappy..... Fehler! Textmarke nicht definiert.	
6.2	Sony IMX568	16
7	Optional features.....	20
7.1	Lighting.....	20
7.1.1	Universal Illumination Module..... Fehler! Textmarke nicht definiert.	
7.2	Liquid Lens (S-Mount)	21
7.3	I/O Expansion module	21
7.4	Coral Edge TPU	Fehler! Textmarke nicht definiert.
8	Mechanical information.....	22
8.1	S-Mount	22
8.1.1	Mechanical drawing	22
8.1.2	Focus adjustment.....	23
8.1.3	SD Card access.....	24
8.1.4	Universal Illumination Module..... Fehler! Textmarke nicht definiert.	
8.2	C-Mount	25
8.2.1	Mechanical drawing	25
9	Support	26
10	Document history.....	27

1 Handling and safety instructions



Depending on the operating conditions and mounting situation, the housing temperature can exceed 60 °C. There is a risk of injury!



Universal Illumination Module: Risk Group 2

CAUTION. Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to the eye.



EMC conformity according to EN/IEC 61000-6-2:2005 is qualified for cable lengths ≤ 30 m.



Electrical installation should be executed without power applied to the device and all connected devices.



Please take special note of the voltage range which may be applied to the device. Otherwise, permanent damage to the device may result!



Due to the characteristics and physical principles inside flash memory, **memory cards have a finite lifetime** dictated by the number of write operations. Therefore, take care of the regular write operations to prevent an early flash damage.

2 Introduction

The heart of the Vision Sensor PV4 is a six-core ARM Cortex-A55 SoC. We deliver the camera with a Debian based Linux OS, which gives the customer the capabilities to use popular Linux programs and libraries. Debian currently provides more than 40.000 packets. Therefore, the customer can use even very rare libraries in an easy way.

The Vision Sensor PV4 offers two digital inputs and four digital outputs. Furthermore, the Vision Sensor PV4 is available with different LED lighting options which can solve difficult lighting conditions.

The synergy of 3.2 MP and 5.1 MP global shutter sensors as well as an 8.3 MP rolling shutter sensor and the IMAGO Frame Grabber Library offer you a solid foundation for machine vision applications.

2.1 Main features

- SoC: NXP i.MX95
 - 6× ARM Cortex-A55 1.8 GHz
 - 2 GB or 4 GB LPDDR4 RAM
- Image sensors
 - Sony IMX900 3.2 MP: 2048 × 1536 pixels – global shutter
 - Sony IMX568 5 MP: 2472 × 2064 pixels – global shutter
 - Sony IMX678 8.3 MP: 3840 × 2160 pixels – rolling shutter
 - Monochrome or Bayer pattern
- 24 V_{DC} power supply
- Digital inputs / outputs
 - 4× digital output
 - 2× digital input
- Ethernet interface 2500 Mbit/s
- Main storage: μSD card (SD, SDHC, SDXC)
- Housing
 - Passive cooling without heat sink
 - S-Mount version with different lens options including Liquid Lens
 - C-Mount version
- Four integrated LEDs for S-Mount version
- C-Mount-Option: LED-ring light
 - Adjustable LED current
- Deep Learning accelerator NPU with 2 TOPS integrated
- Optional I/O Expansion DIN rail module
 - Provides additional I/Os
 - Implements IMAGO's Real-Time Communication Controller

2.2 Configurations

The following table shows available features and interfaces for the different models of the Vision Sensor PV4:

	S-Mount			C-Mount		
Sensor	Sony					
	IMX900	IMX568	IMX678	IMX900	IMX568	IMX678
SoC	NXP i.MX95 6 × Cortex-A55, 1.8 GHz					
RAM	2 GB or 4 GB					
Main storage	μSD card ≥ 32 GB					
Ethernet	1× 2500 Mbit/s					
Dig. I/Os	2× IN / 4× OUT					
LED lighting	Four integrated LEDs			-		
Optional features	Liquid Lens			LED ring light		
	I/O Expansion DIN rail module					

2.3 Block diagram

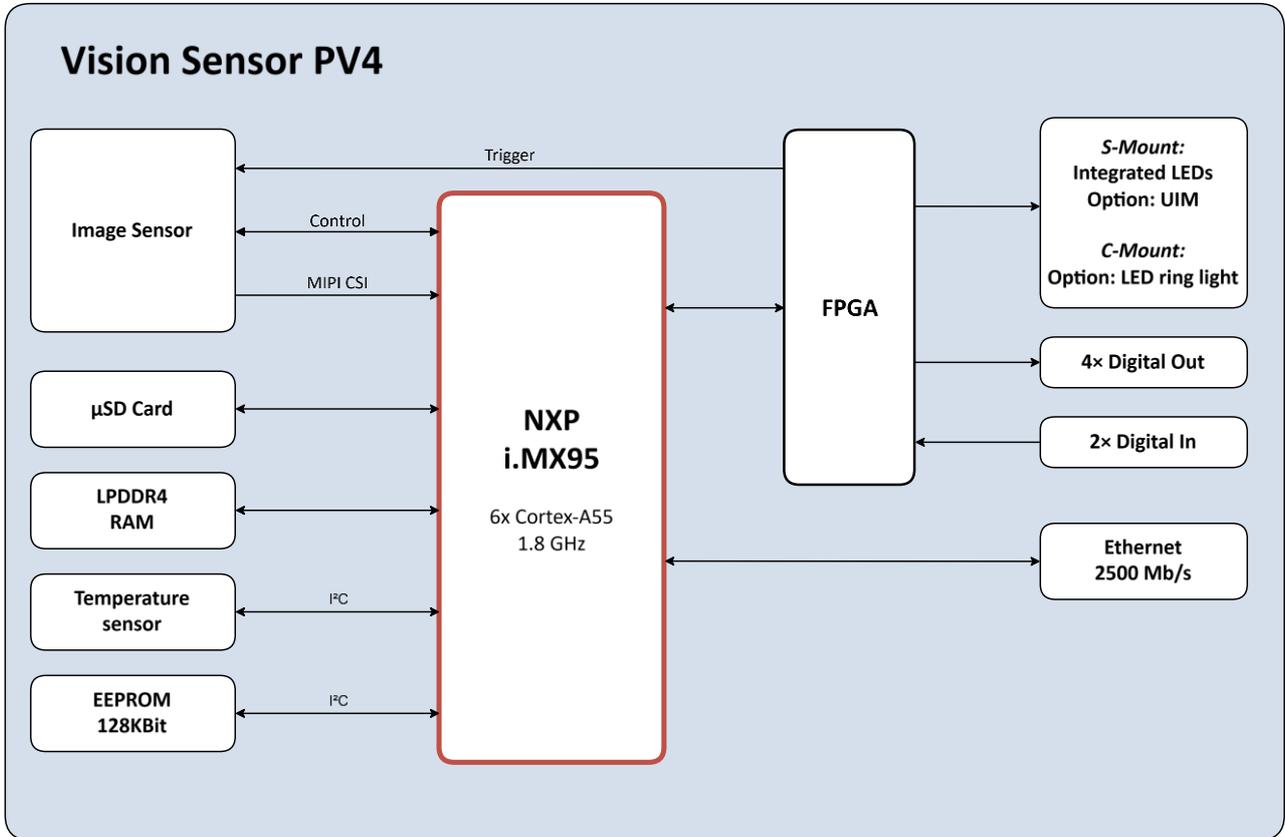


Figure 1: Vision Sensor PV4 block diagram

3 Operating Conditions

Power Supply:

Model	Supply voltage	Peak current at 24 V
S-Mount with integrated LED unit (four LEDs)	21...28 V	T.b.d.
C-Mount standard		T.b.d.
C-Mount with Coral Edge TPU		T.b.d.
C-Mount with LED ring light (default LED current)		T.b.d.
C-Mount with LED ring light (max. LED current)		T.b.d.

Environment:

Parameter	Value	Unit
Weight, including cable	125	g
Operating temperature	5 ... 45	°C
Operating humidity, relative, non-condensing	5 ... 95	%
Storage temperature	-30 ... +70	°C
Storage humidity, relative, non-condensing	5 ... 95	%

Digital Input:

Parameter	Min.	Typ.	Max.	Unit
Input voltage range	0		25	V
Rising edge threshold voltage	7.4		9.4	V
Falling edge threshold voltage	4.7		6.3	V
Input resistance		15.5		kΩ

Digital Output:

Parameter	Min.	Typ.	Max.	Unit
Output current			50	mA
Output high voltage		$V_{Supply} - 0.2$		V

4 Status LEDs

The Vision Sensor PV4 is equipped with two dual-color status LEDs. The meaning of each LED is listed in the tables below.

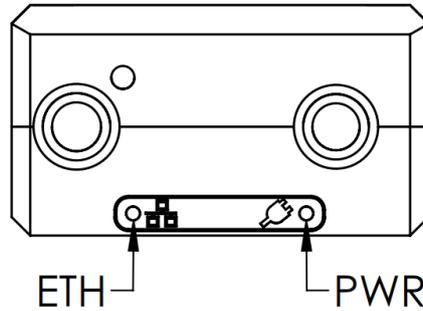


Figure 2: Status LEDs

PWR LED	State
Off	Power off
Green	Power on
Red	Digital IN0 signal is high

Table 1: PWR LED states

ETH LED	State
Green	Ethernet link is up
Red	Ethernet activity

Table 2: ETH LED states

5 Interfaces

5.1 Power and I/O

A non-shielded, 0.5 meter cable with an M12 8-pin connector is used for power supply and I/O signals.

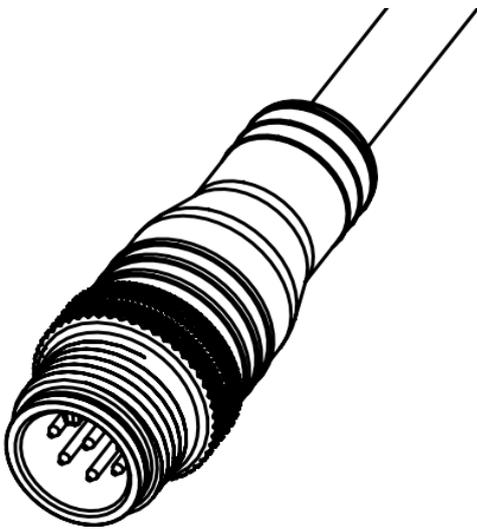


Figure 3: Power supply and I/O cable

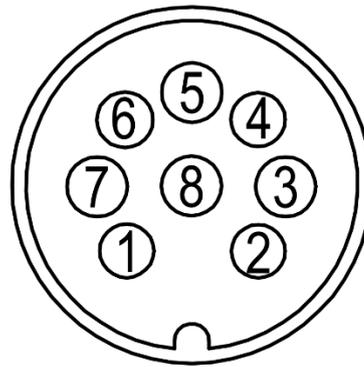


Figure 4: Pin assignment M12 connector

Pin	Function
1	Power Supply (+)
2	GND
3	Digital IN0
4	Digital IN1
5	Digital OUT3
6	Digital OUT0
7	Digital OUT1
8	Digital OUT2

Table 3: Pin assignment M12 connector

5.1.1 Digital I/Os

The following illustration shows the electrical equivalent circuit for the digital input and output signals:

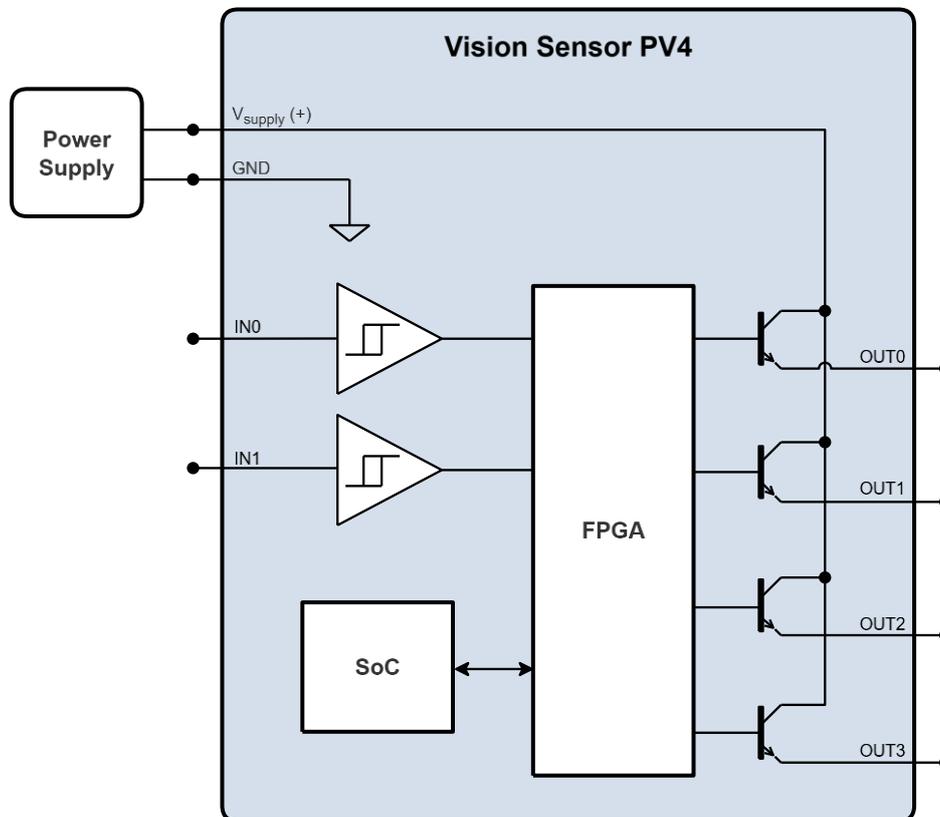


Figure 5: Simplified digital I/O circuit

The input signals use a Schmitt trigger circuit with the power supply GND as voltage reference.

The digital output circuit uses open-emitter configuration. All outputs are driven by the power supply voltage.

5.2 2500 Mbit/s Ethernet

A shielded 0.5 m Ethernet cable with an M12 8-pin X-coded connector is used for the 2500BASE-T interface.

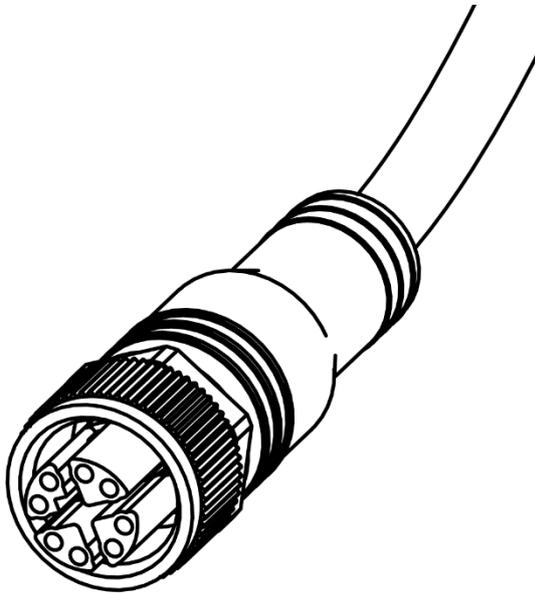


Figure 6: Ethernet cable

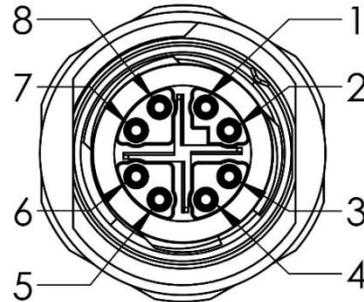


Figure 7: Pin assignment M12 connector

PIN	Function
1	D1+
2	D1-
3	D2+
4	D2-
5	D4+
6	D4-
7	D3-
8	D3+

Table 4: Pin assignment M12 connector

We recommend using shielded cables, for example:

Length	Product	IMAGO order code
1 m	Phoenix contact 1407471 "NBC-MSX/ 1,0-94F/R4AC SCO"	10007049
2 m	Phoenix contact 1407472 "NBC-MSX/ 2,0-94F/R4AC SCO"	10007050
5 m	Phoenix contact 1407473 "NBC-MSX/ 5,0-94F/R4AC SCO"	10008076

6 Image sensors

This chapter will give you a short overview of the available sensors for the Vision Sensor PV4. On the next pages, you will find more detailed information for each sensor.


	Sony Pregius S IMX900	Sony Pregius S IMX568	Sony Stravis 2 IMX678
Size	1/3.1"	1/1.8"	
Resolution	2048 × 1536	2472 × 2064	3840 × 2160
Framerate (full resolution)	125 fps	96 fps	72 fps
Framerate (VGA)	321 fps	337 fps	
Type	Monochrome or Bayer pattern		

Table 5: Sensor overview

6.1 Sony IMX900

Overview:



- 3.2 M-pixel
- Monochrome or RGB Bayer pattern
- Global shutter
- Partial scan function (ROI) to increase frame rate
- 10-bit ADC with 8-bit image readout
- External synchronization via digital inputs
- Easy-to-use software API

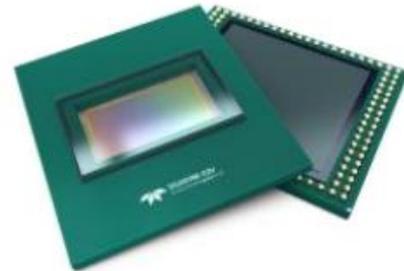

Details:

		Sony IMX900
Sensor	Technology	CMOS
	Sensor Size	1/3.1"
	Resolution	2064 x 1552 pixels
	Framerate (full resolution)	125 fps
	Partial Scan	Yes
	Color	Monochrome or Bayer pattern
	Pixel Size	2.2 μm x 2.2 μm
	A/D Converter	10-bit ADC with 8-bit image readout
Trigger	Acquisition Modes	Global shutter Overlapped integration and readout in free-run mode
	Trigger Modes	Free run, Software trigger, Hardware trigger
	Exposure Indicator Output	Controlled by software

Quantum Efficiency

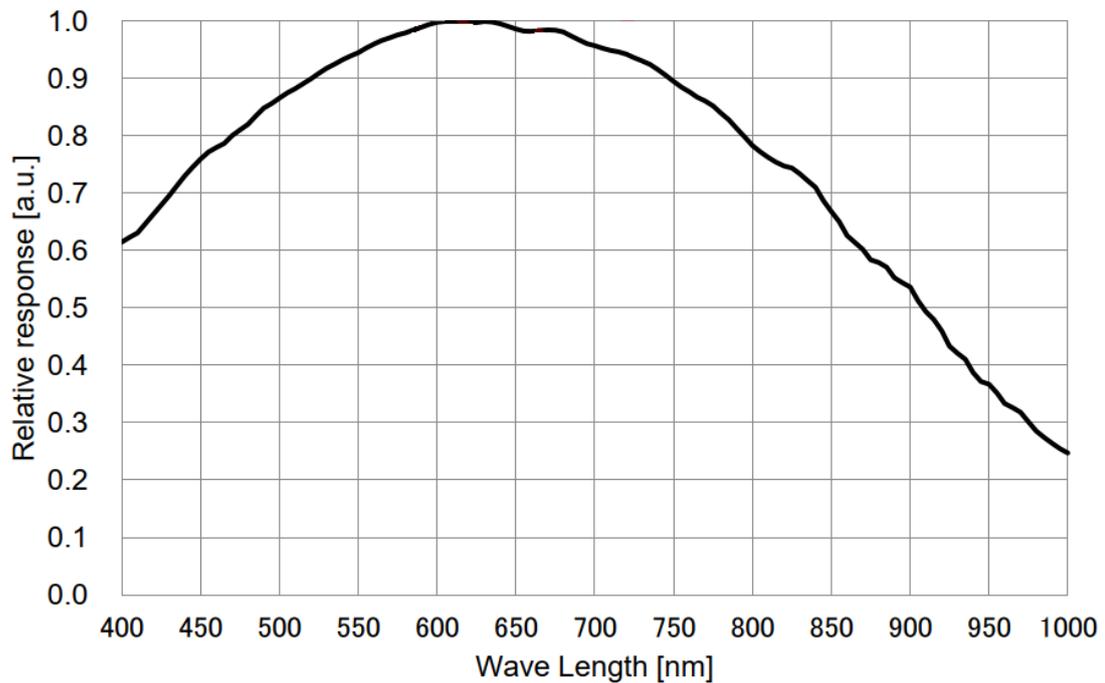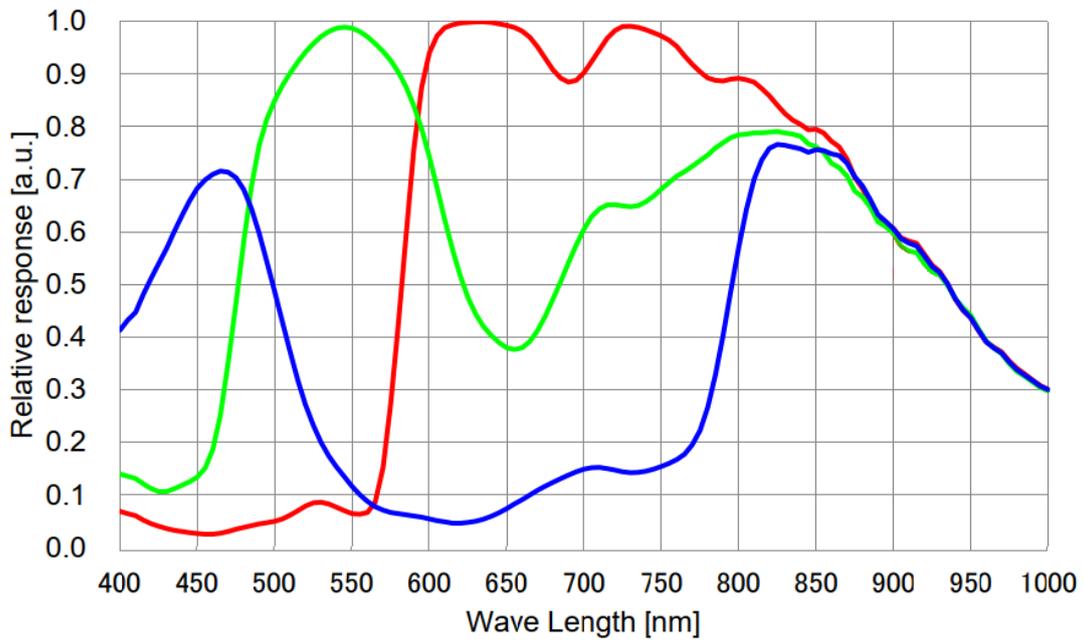

Note for RGB sensors:

An IR cut-off filter in the optical path is necessary to obtain good color separation when using light with an NIR component.

6.2 Sony IMX568

Overview:


- 5 M-pixel Monochrome or RGB Bayer pattern
- Global shutter
- Partial scan function (ROI) to increase frame rate
- 10-bit ADC with 8-bit image readout
- External synchronization via digital inputs
- Easy-to-use software API

Details:


Sensor	Technology	CMOS
	Sensor Size	1/8"
	Resolution	2572 x 2064 pixels
	Framerate (full resolution)	96 fps
	Partial Scan	Yes
	Color	Monochrome or Bayer pattern
	Pixel Size	2.74 μm x 2.74 μm
	A/D Converter	10-bit, with linear or compressed mapping to 8 bit
	Analog Gain	0 ... 24 dB

Trigger	Acquisition Modes	Global shutter Overlapped integration and readout in free-run mode
	Trigger Modes	Free run, Software trigger, Hardware trigger
	Exposure Indicator Output	Controlled by software

Total Quantum Efficiency – Monochrome sensor

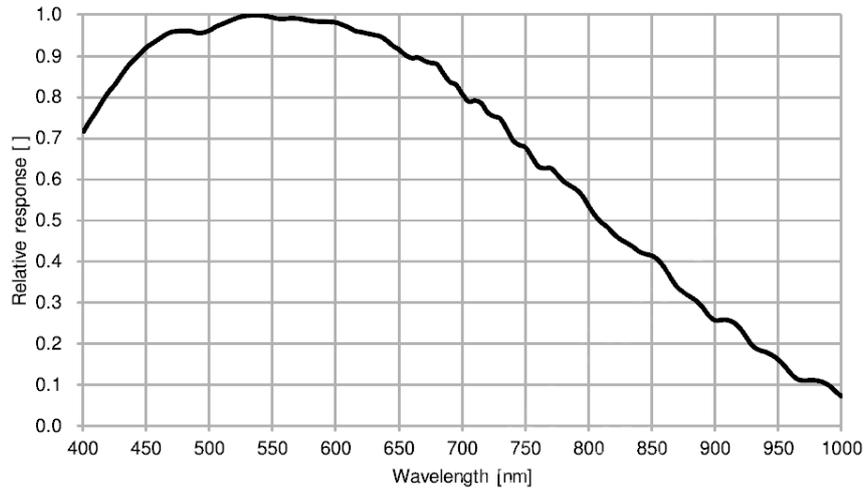

Color Filter Response – Color sensor

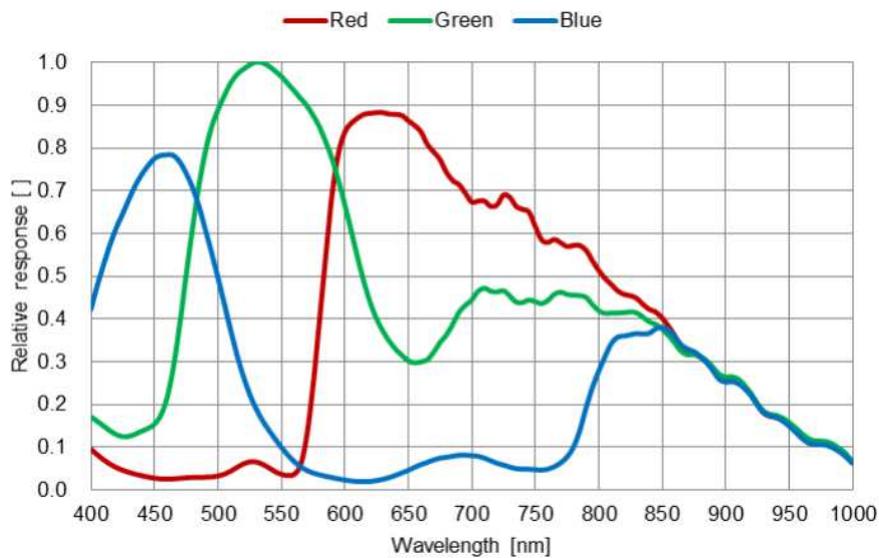

Note for RGB sensor:

An IR cut-off filter in the optical path is necessary to obtain good color separation when using light with an NIR component.

6.3 Sony IMX678

Overview:

- 8.3 M-pixel RGB Bayer pattern
- Rolling shutter
- Optimized for low light conditions
- 2/2 binning mode
- 10-bit ADC with 8-bit image readout
- High dynamic range (HDR) function
 - Digital overlap
 - Clear HDR
- External synchronization via TSN
- Easy-to-use software API

Details:


Sensor	Technology	CMOS
	Sensor Size	1/1.8"
	Resolution	3840 x 2160 pixels
	Framerate (full resolution)	72 fps
	Partial Scan	Yes
	Color	Bayer pattern or Monochrome (t.b.d.)
	Pixel Size	2.0 μm x 2.0 μm
	A/D Converter	
	Analog Gain	

Trigger	Acquisition Modes	Rolling shutter Overlapped integration and readout
	Trigger Modes	Free run, Synchronized by TSN
	Exposure Indicator Output	Controlled by software

Total Quantum Efficiency – Monochrome sensor

t.b.d.

Color Filter Response – Color sensor

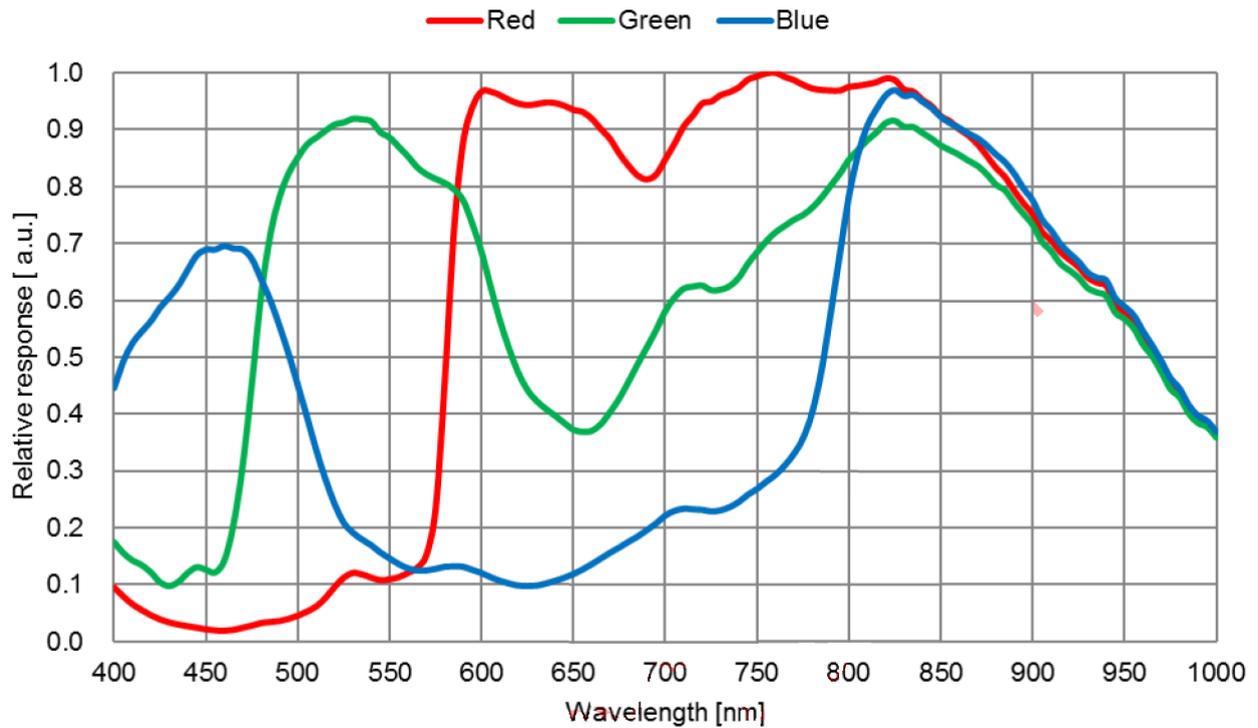

Note for RGB sensor:

An IR cut-off filter in the optical path is necessary to obtain good color separation when using light with an NIR component.

7 Optional features

7.1 Lighting

The following lighting options are available:

	Integrated LEDs	Ring Light
Device model	S-Mount	C-Mount
Number of LEDs	4	6
LED color	White	White
LED current	Constant	Adjustable ¹
Flash duration	Same as sensor exposure	Same as sensor exposure
Duty cycle at max. current	25%	16%

Table 6: Lighting options

¹ The LED current is not adjustable for old hardware revisions. New hardware revisions can provide higher current settings. The default setting is comparable to the old revision for software compatibility.

7.2 Liquid Lens (S-Mount)

The plane of focus for the Liquid Lens is controlled by software. The algorithm is implemented in the *ViewIT* software. For custom applications, the algorithm must be implemented by the user.

Note

The plane of focus depends on the temperature of the device. Therefore, the lens must be adjusted regularly by the application.

7.3 I/O Expansion module



The Vision Sensor I/O Expansion is a DIN rail module which can be connected to the Vision Sensor PV4. It provides additional I/Os and implements IMAGO's Real-Time Communication Controller.

The device is connected to the Power and I/O cable of the Vision Sensor. The I/O Expansion module provides power to the Vision Sensor. The digital I/O signals between both devices are used for internal communication and for transmission of trigger signals.


A standard M12-8 A-coded extension cable up to 20 meters can be used to allow long distance between the Vision Sensor and the I/Os.

Refer to the Hardware Manual for the I/O Expansion module for more information.

8 Mechanical information

8.1 S-Mount

8.1.1 Mechanical drawing

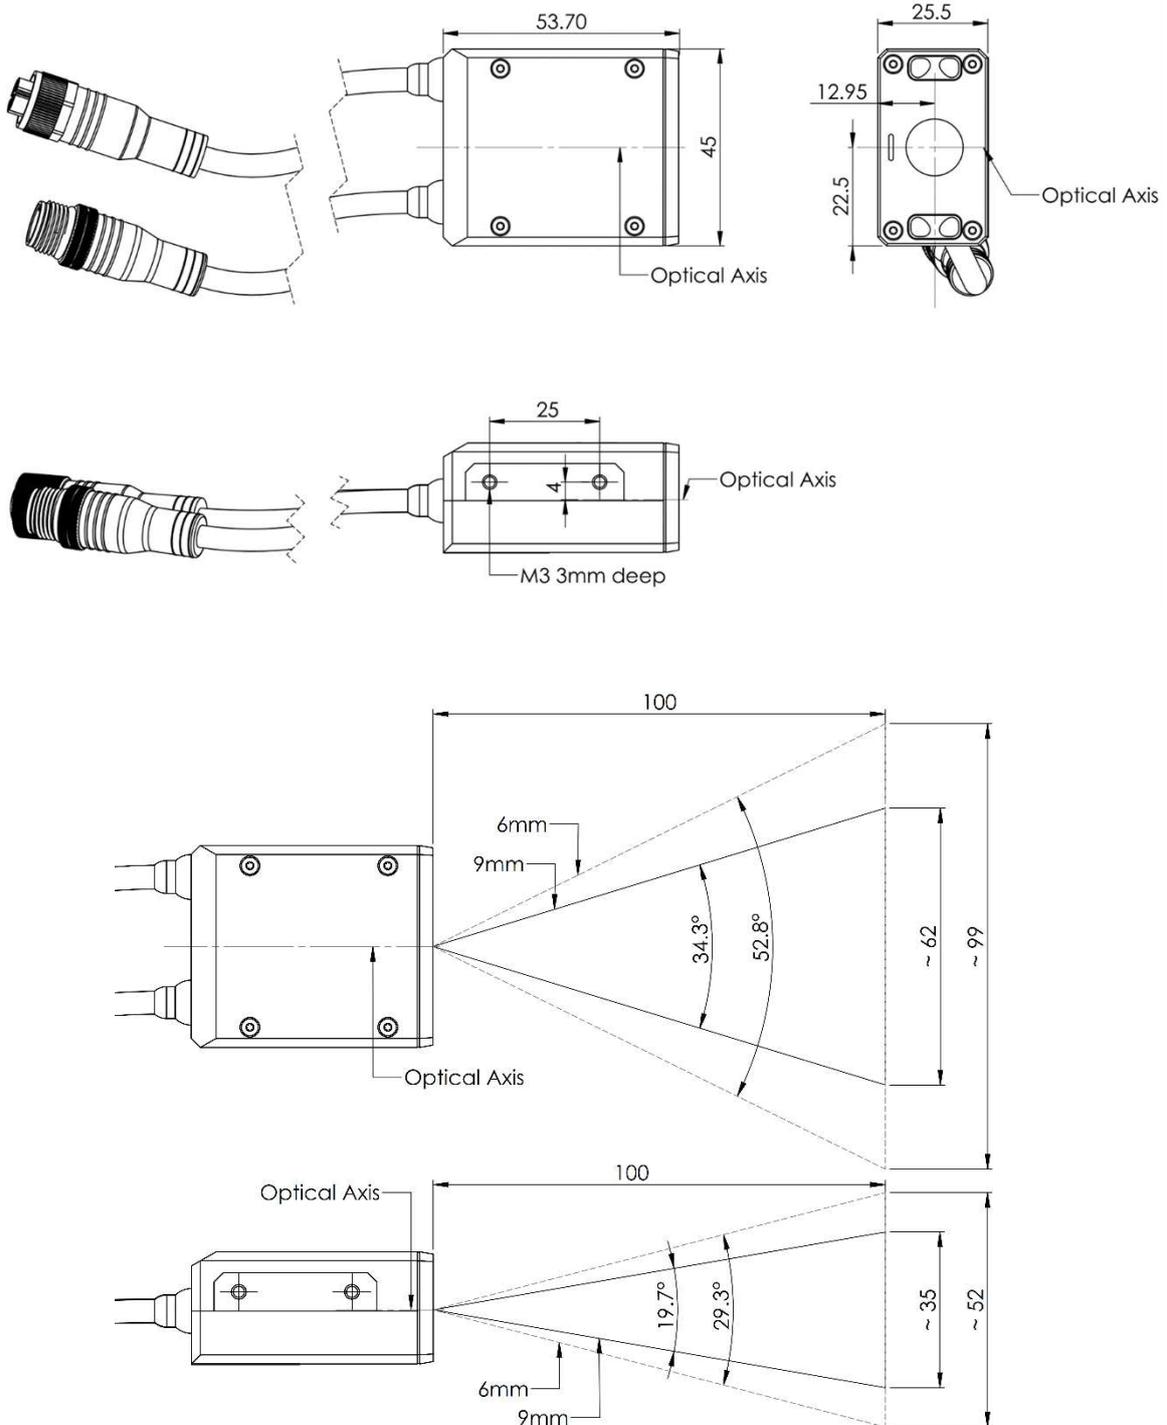

8.1.2 Focus adjustment

Note

Mechanical focus adjustment is not provided for the Liquid Lens option.

To adjust the focus, the hexagon socket set screw located on the back of the camera must be removed:

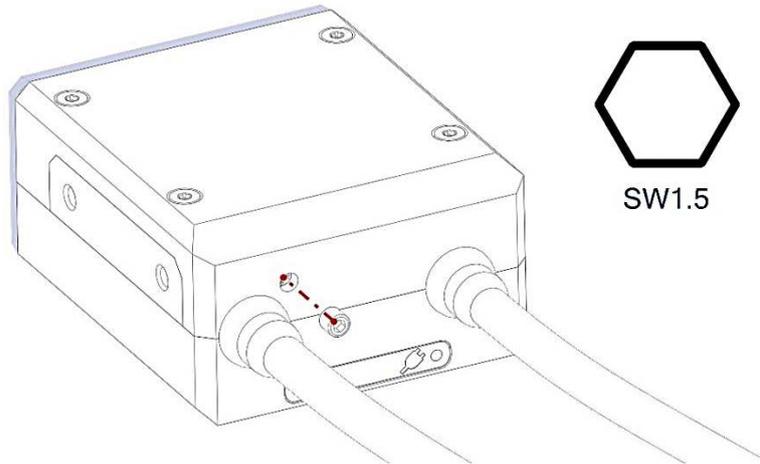


Figure 8: Removing the hexagon socket set screw

Screw clockwise to bring the plane of focus closer to the camera. Screw counterclockwise to bring the plane of focus away from the camera.

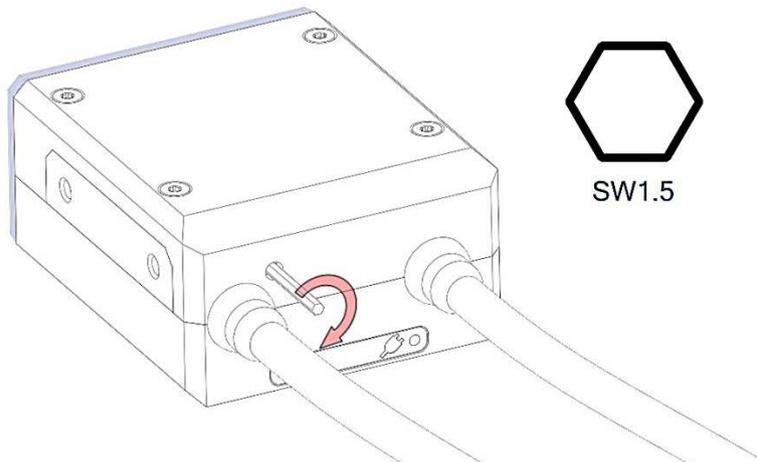


Figure 9: Adjusting the focus

8.1.3 SD Card access

Note

Access to the μ SD card is only provided for the S-Mount version without Universal Illumination Module.

Every Vision Sensor is shipped with a preinstalled μ SD card containing the Linux operating system. Software updates are normally installed remotely over Ethernet.

First, the lens / LED cover must be removed as shown in the picture below:

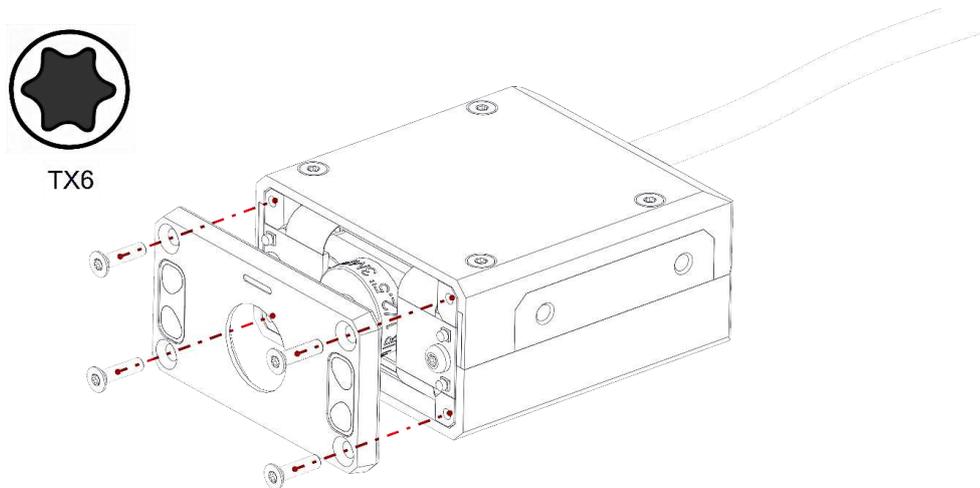


Figure 10: Removing the lens / LED cover

Push the μ SD card carefully to release it from the socket:



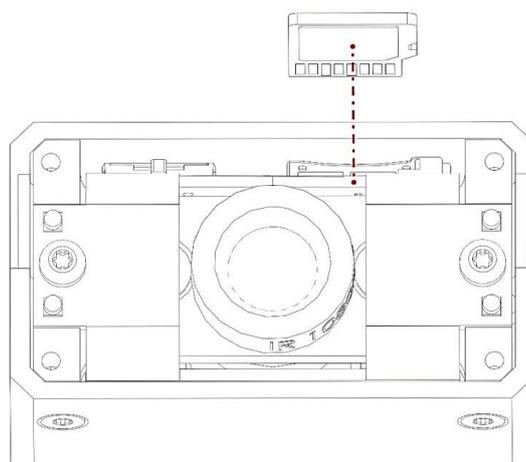


Figure 11: Changing the μ SD card

8.2 C-Mount

8.2.1 Mechanical drawing

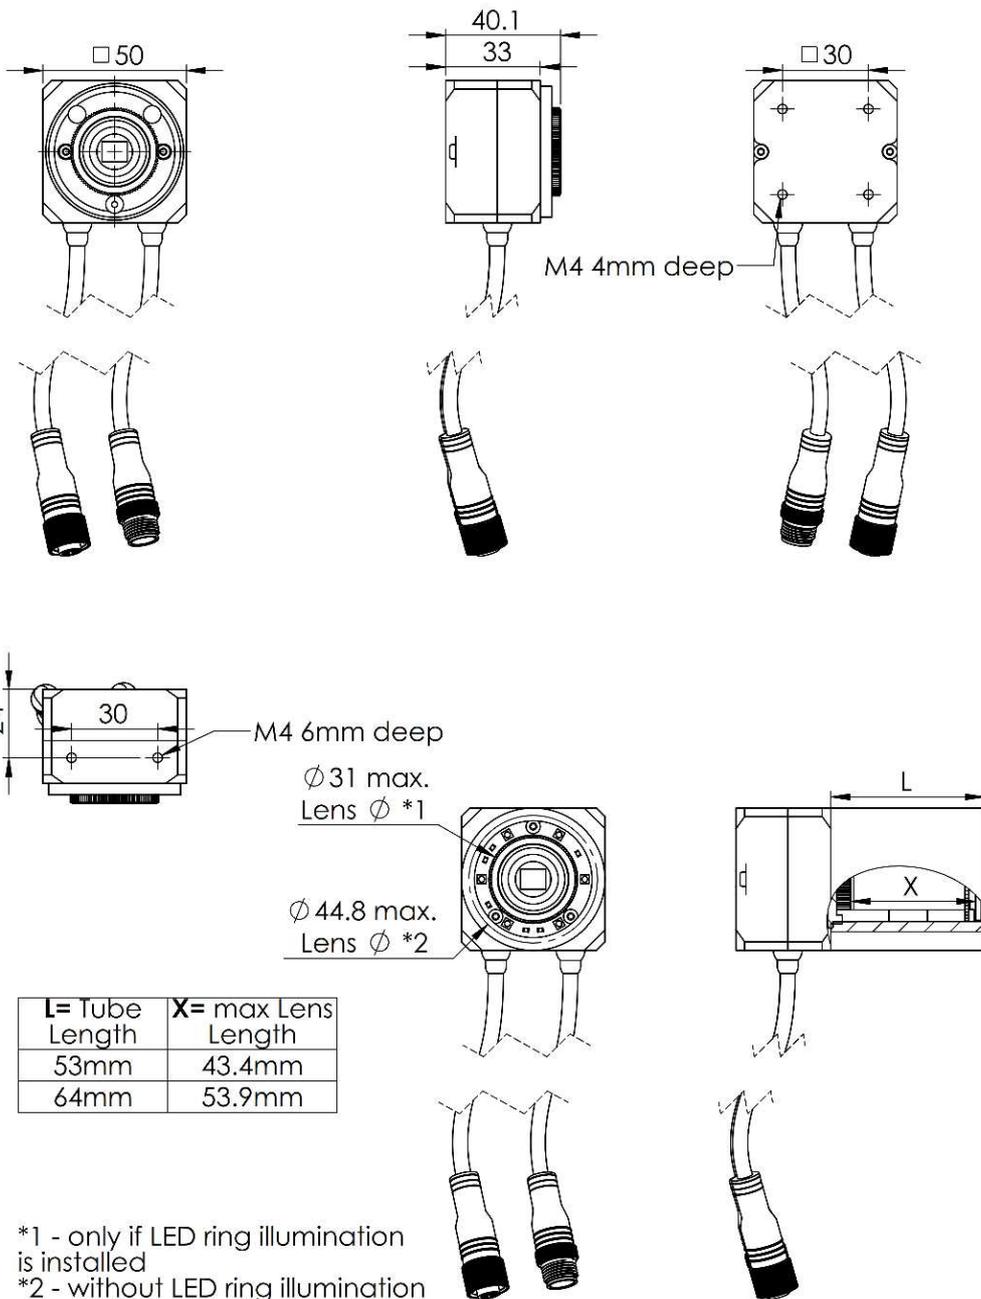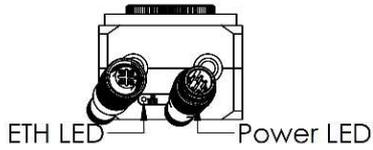

9 Support

Finally, if you have any open questions, the IMAGO support team is happy to assist you in any cases. For direct contact to the support, please use the ticket system: <https://imago-technologies.com/rma/>

Visit the IMAGO Download Portal to get access to the latest SDKs, documentation, and Linux releases: <https://imago-technologies.com/technical-documentation/>

Software documentation is available at <https://api.imago.tech>.

10 Document history

Revision	Date	Changes
		-
		-
		-
		-
1.0	Feb-2026	- First release